

## 高效通用钢件钻头 · 外冷钻

# HD510-TF


P K M

## HD510-TF

### 高效通用钢件钻头 · 外冷钻



P K M

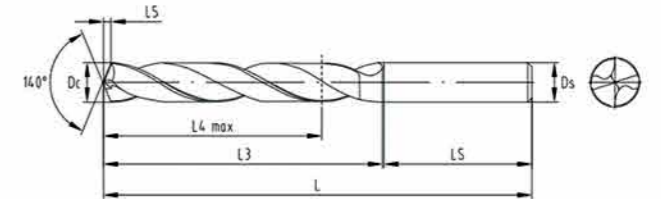

#### 特点和优势

- 超微晶粒度硬质合金外冷棒料, 表面DH涂层。
- 钻头直径公差m7, 加工孔精度 IT8-9。
- 高生产效率和长刀具寿命。
- 可修磨3-5次, 降低刀具使用成本。
- 接受非标定制。

#### 应用

- 广泛应用于通用机械、模具、汽车、制冷等行业
- 适用于通孔、盲孔、叠板加工
- 钻削深度3xD、5xD

刃径 Dc (mm)	柄径 Ds (mm)	柄长 Ls (mm)	3xD			5xD		
			最大钻削深度 L4 (mm)	槽长 L3 (mm)	总长 L (mm)	最大钻削深度 L4 (mm)	槽长 L3 (mm)	总长 L (mm)
3.00	4	36	28	20	62	28	28	62
3.10	4	36	28	20	62	28	28	62
3.20	4	36	28	20	62	28	28	62
3.30	4	36	28	20	62	28	28	62
3.40	4	36	28	20	62	28	28	62
3.50	4	36	28	20	62	28	28	62
3.60	4	36	28	20	62	28	28	62
3.70	4	36	28	20	62	28	28	62
3.80	4	36	28	24	66	28	28	62
3.90	4	36	28	24	66	28	28	62
4.00	4	36	28	24	66	28	28	62
4.10	6	36	28	24	66	36	36	74
4.20	6	36	36	24	66	36	36	74
4.30	6	36	36	24	66	36	36	74
4.40	6	36	36	24	66	36	36	74
4.50	6	36	36	24	66	36	36	74
4.60	6	36	36	24	66	36	36	74
4.70	6	36	36	24	66	36	36	74
4.80	6	36	36	28	66	36	44	82
4.90	6	36	36	28	66	36	44	82
5.00	6	36	36	28	66	36	44	82
5.10	6	36	36	28	66	36	44	82
5.20	6	36	36	28	66	36	44	82
5.30	6	36	36	28	66	36	44	82
5.40	6	36	36	28	66	36	44	82
5.50	6	36	36	28	66	36	44	82
5.60	6	36	36	28	66	36	44	82
5.70	6	36	36	28	66	36	44	82
5.80	6	36	36	28	66	36	44	82
5.90	6	36	36	28	66	36	44	82
6.00	6	36	36	28	66	36	44	82
6.10	8	36	36	34	79	36	53	91
6.20	8	36	36	34	79	36	53	91
6.30	8	36	36	34	79	36	53	91
6.40	8	36	36	34	79	36	53	91
6.50	8	36	36	34	79	36	53	91
6.60	8	36	36	34	79	36	53	91
6.70	8	36	36	34	79	36	53	91
6.80	8	36	36	34	79	36	53	91
6.90	8	36	36	34	79	36	53	91
7.00	8	36	36	34	79	36	53	91
7.10	8	36	36	34	79	36	53	91
7.20	8	36	36	41	79	36	53	91


■ 标准库存, 订货示例: HD510-TF\_3D\_钻头刃径: 订购需咨询库存。  
非标价格交期需咨询, 最小起订量 Dc<10mm 10支, Dc≥10mm 5支。

# HD510-TF

高效通用钢件钻头 · 外冷钻



P K M

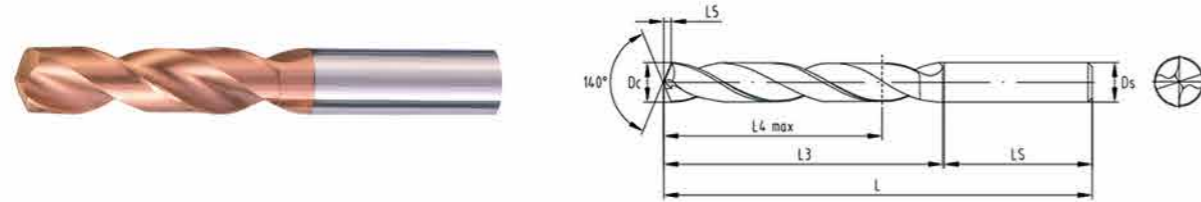

刃径 Dc (mm)	柄径 Ds (mm)	柄长 Ls (mm)	3xD			5xD		
			最大钻削深度 L4 (mm)	槽长 L3 (mm)	总长 L (mm)	最大钻削深度 L4 (mm)	槽长 L3 (mm)	总长 L (mm)
7.30	8	36	36	41	79	36	53	91
7.40	8	36	36	41	79	36	53	91
7.50	8	36	36	41	79	36	53	91
7.60	8	36	36	41	79	36	53	91
7.70	8	36	36	41	79	36	53	91
7.80	8	36	36	41	79	36	53	91
7.90	8	36	36	41	79	36	53	91
8.00	8	40	36	41	79	36	53	91
8.10	10	40	40	47	89	40	61	103
8.20	10	40	40	47	89	40	61	103
8.30	10	40	40	47	89	40	61	103
8.40	10	40	40	47	89	40	61	103
8.50	10	40	40	47	89	40	61	103
8.60	10	40	40	47	89	40	61	103
8.70	10	40	40	47	89	40	61	103
8.80	10	40	40	47	89	40	61	103
8.90	10	40	40	47	89	40	61	103
9.00	10	40	40	47	89	40	61	103
9.10	10	40	40	47	89	40	61	103
9.20	10	40	40	47	89	40	61	103
9.30	10	40	40	47	89	40	61	103
9.40	10	40	40	47	89	40	61	103
9.50	10	40	40	47	89	40	61	103
9.60	10	40	40	47	89	40	61	103
9.70	10	40	40	47	89	40	61	103
9.80	10	40	40	47	89	40	61	103
9.90	10	40	40	47	89	40	61	103
10.00	10	40	40	47	89	40	61	103
10.10	12	45	45	55	102	45	71	118
10.20	12	45	45	55	102	45	71	118
10.30	12	45	45	55	102	45	71	118
10.40	12	45	45	55	102	45	71	118
10.50	12	45	45	55	102	45	71	118
10.60	12	45	45	55	102	45	71	118
10.70	12	45	45	55	102	45	71	118
10.80	12	45	45	55	102	45	71	118
10.90	12	45	45	55	102	45	71	118
11.00	12	45	45	55	102	45	71	118
11.10	12	45	45	55	102	45	71	118
11.20	12	45	45	55	102	45	71	118
11.30	12	45	45	55	102	45	71	118
11.40	12	45	45	55	102	45	71	118
11.50	12	45	45	55	102	45	71	118


■ 标准库存，订货示例：HD510-TF\_3D\_钻头刃径；订购需咨询库存。  
 非标价格交期需咨询，最小起订量 Dc<10mm 10支，Dc≥10mm 5支。

# HD510-TF

高效通用钢件钻头 · 外冷钻



P K M

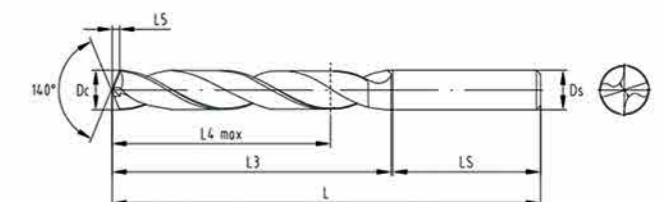

刃径 Dc (mm)	柄径 Ds (mm)	柄长 Ls (mm)	3xD			5xD		
			最大钻削深度 L4 (mm)	槽长 L3 (mm)	总长 L (mm)	最大钻削深度 L4 (mm)	槽长 L3 (mm)	总长 L (mm)
11.60	12	45	45	55	102	45	71	118
11.70	12	45	45	55	102	45	71	118
11.80	12	45	45	55	102	45	71	118
11.90	12	45	45	55	102	45	71	118
12.00	12	45	45	55	102	45	71	118
12.10	14	45	45	60	107	45	77	124
12.20	14	45	45	60	107	45	77	124
12.30	14	45	45	60	107	45	77	124
12.40	14	45	45	60	107	45	77	124
12.50	14	45	45	60	107	45	77	124
12.60	14	45	45	60	107	45	77	124
12.80	14	45	45	60	107	45	77	124
12.90	14	45	45	60	107	45	77	124
13.00	14	45	45	60	107	45	77	124
13.10	14	45	45	60	107	45	77	124
13.20	14	45	45	60	107	45	77	124
13.30	14	45	45	60	107	45	77	124
13.40	14	45	45	60	107	45	77	124
13.50	14	45	45	60	107	45	77	124
13.60	14	45	45	60	107	45	77	124
13.70	14	45	45	60	107	45	77	124
13.80	14	45	45	60	107	45	77	124
13.90	14	45	45	60	107	45	77	124
14.00	14	45	45	60	107	45	77	124
14.10	16	48	48	65	115	48	83	133
14.20	16	48	48	65	115	48	83	133
14.30	16	48	48	65	115	48	83	133
14.40	16	48	48	65	115	48	83	133
14.50	16	48	48	65	115	48	83	133
14.60	16	48	48	65	115	48	83	133
14.70	16	48	48	65	115	48	83	133
14.80	16	48	48	65	115	48	83	133
14.90	16	48	48	65	115	48	83	133
15.00	16	48	48	65	115	48	83	133
15.10	16	48	48	65	115	48	83	133
15.20	16	48	48	65	115	48	83	133
15.30	16	48	48	65	115	48	83	133
15.40	16	48	48	65	115	48	83	133
15.50	16	48	48	65	115	48	83	133
15.60	16	48	48	65	115	48	83	133
15.70	16	48	48	65	115	48	83	133
15.80	16	48	48	65	115	48	83	133
15.90	16	48	48	65	115	48	83	133
16.00	16	48	48	65	115	48	83	133

■ 标准库存，订货示例：HD510-TF\_3D\_钻头刃径；订购需咨询库存。  
 非标价格交期需咨询，最小起订量 Dc<10mm 10支，Dc≥10mm 5支。